


Structure and Ordering Information



Product	Outer Diameter	Catalog No.	Usable Length	Tip Shape
ASAHI Silverway	0.89 <sub>mm</sub> (0.035 <sub>inch</sub> )	SA0035N15S	150 <sub>cm</sub>	Angled
		SA0035N18S	180 <sub>cm</sub>	Angled
		SA0035N20S	200 <sub>cm</sub>	Angled
		SA0035N22S	220 <sub>cm</sub>	Angled
		SA0035N26S	260 <sub>cm</sub>	Angled
		SA0035N30S	300 <sub>cm</sub>	Angled
		SJ1535N15S	150 <sub>cm</sub>	J-shape 1.5 <sub>mm</sub>
		SJ1535N18S	180 <sub>cm</sub>	J-shape 1.5 <sub>mm</sub>
		SJ1535N20S	200 <sub>cm</sub>	J-shape 1.5 <sub>mm</sub>
		SJ1535N22S	220 <sub>cm</sub>	J-shape 1.5 <sub>mm</sub>
		SJ1535N26S	260 <sub>cm</sub>	J-shape 1.5 <sub>mm</sub>
		SJ1535N30S	300 <sub>cm</sub>	J-shape 1.5 <sub>mm</sub>
		SJ3035N15S	150 <sub>cm</sub>	J-shape 3.0 <sub>mm</sub>
		SJ3035N18S	180 <sub>cm</sub>	J-shape 3.0 <sub>mm</sub>
		SJ3035N20S	200 <sub>cm</sub>	J-shape 3.0 <sub>mm</sub>
		SJ3035N22S	220 <sub>cm</sub>	J-shape 3.0 <sub>mm</sub>
		SJ3035N26S	260 <sub>cm</sub>	J-shape 3.0 <sub>mm</sub>
		SJ3035N30S	300 <sub>cm</sub>	J-shape 3.0 <sub>mm</sub>

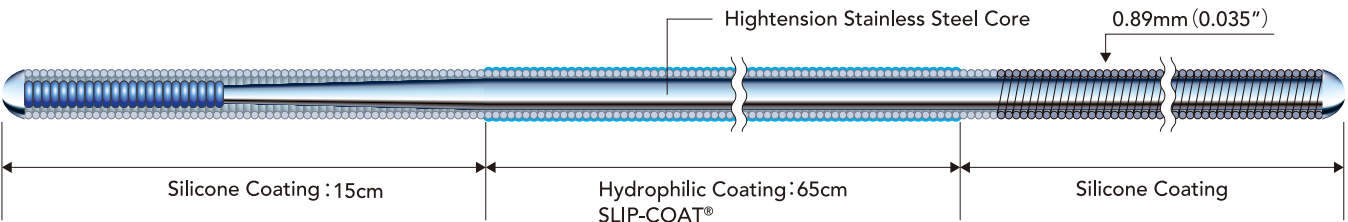

© 2020 ASAHI INTECC CO., LTD.  
"ASAHI", "ACT ONE" and "Silverway" are trademarks or registered trademarks of ASAHI INTECC CO., LTD. in Japan and other countries.  
Coated with SLIP-COAT™ coating.

Manufactured by:



ASAHI INTECC CO.,LTD.

3-100 Akatsuki-cho, Seto, Aichi 489-0071 Japan  
Contact phone number: +81-561-86-9101  
www.asahi-intecc.com

Distributed by:

# ASAHI Silverway

Hydrophilic Coated Spring Coil Guide Wire

with **ACT ONE**



# ASAHI Silverway


Hydrophilic Coated Spring Coil Guide Wire

with **ACT ONE**

ASAHI's newly developed 0.89mm (0.035") spring coil guide wire with ACT ONE technology.

## Double Coil Structure

**Double coil structure** improves durability and maneuverability.

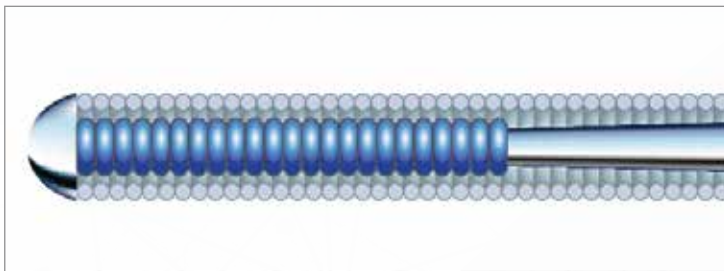


Silicone coating

## Hybrid Shaft Design

### ACT ONE on proximal shaft

ASAHI's technologies are incorporated in the proximal shaft enabling Silverway to achieve outstanding torque performance.

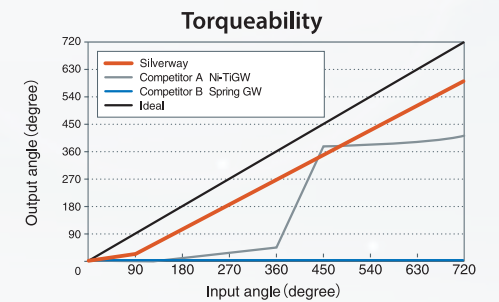

**Testing method**  
The input and output angle of the GW rotation when it is inserted into a looped catheter and the proximal shaft is rotated. The length from the tip to the machine is kept equal.

## Hybrid coating design

### Safety

#### Distal shaft : Silicone - tactile feedback

Distal 15cm is coated with silicone material for better **safety**.

### Maneuverability

#### Mid shaft : Hydrophilic - smooth delivery

Hydrophilic coated mid shaft provides superior lubricity to facilitate smooth delivery.

### Controlability

#### Proximal shaft :

##### Silicone - wire handling

Silicone coated proximal shaft for adequate lubricity and better guide wire handling.


Hydrophilic coating  
SLIP-COAT®

## Safety

### Soft & Radiopaque tip

Silverway's highly flexible and radiopaque tip is designed to be less traumatic and easier to visualize.

### Tip Flexibility



**Testing method**  
The maximum force needed to bend the GW at 3 points 10mm from the tip when pushed.

## Maneuverability

### Tip shape

The tip shape of both J-shape and Angled can be stretched easily by hand. It can be inserted into the Y-connector without the use of an inserter.

